




T2.00199026


# Smart Outdoor PoE Security Kit

## Quick Start Guide

Version 1.0.0

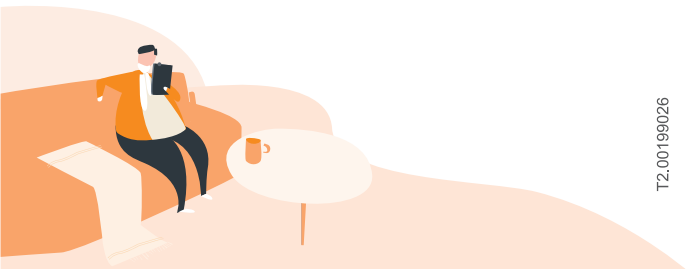

### Packing List



Recorder×1 (1 TB HDD Built-in)

- Power Adapter
- Network Cable
- Mouse
- NVR QSG
- 1 TB HDD Built-in



Camera×4

- Screw Package
- Positioning Map
- IPC QSG




Network Cable (60 ft) × 4




KIT QSG×1

### Recorder

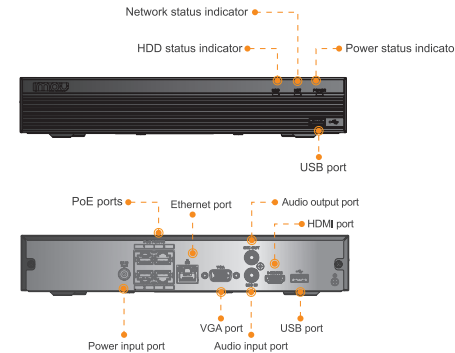

LED Indicator Status	Recorder Status
HDD status indicator off	HDD is working properly
HDD status indicator on	HDD failure
Network status indicator off	Network connection is normal
Network status indicator on	Network connection failure
Power status indicator on	Power connection is normal

### Camera



LED Indicator Status	Camera Status
Off	Powered off/LED turned off
Red light on	<ul style="list-style-type: none"><li>● Booting</li><li>● Camera malfunction</li></ul>
Green light on	Operating properly
Red light flashing	Network connection failure
Green and red lights flashing alternately	Firmware updating

### Connection

We recommend that you use PoE connection to connect the recorder and IPCs.  
PoE connection: After recorder and IPC are powered on, the IPC will automatically connect to the corresponding channel.


**Step 1** Select the area to monitor.

**Step 2** Lay out the network cable.

We recommend conduit for network cables.


**Step 3** Install and fix the camera.

- 1). Drill screw holes on the mounting surface as the positioning map shows, and then put in the expansion bolts.
- 2). Attach the pedestal to the mounting surface with the self-tapping screws.
- 3). Connect network cable to the camera.



Make sure that the mounting surface is strong enough to hold at least three times of the camera weight.

**Step 4** Install and connect hardware according to the following figure.

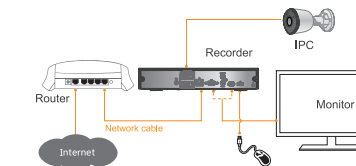

The dotted line in the figures represents a VGA cable or HDMI cable. Choose one as needed.

**Step 5** Make sure that the connection is correct and power on.

## Local Basic Operation

### 1 Power On and Off

#### Booting up :

Connect a monitor to the recorder, and then plug in the power to boot up the recorder.

#### Shutdown:

Select **Main Menu > SHUTDOWN** to enter the **SHUTDOWN** interface, and then click **Shut down**. Unplug the power after the monitor is blank.

⚠ Do not force the recorder to shut down (or unplug the power) when the interface is indicating **Saving data** or the recorder is recording videos.

### 2 Initialization

After turning on the recorder for the first time, you need to initialize the recorder by the following steps.

- 1) Set parameters for the administrator (the default username is admin).
- 2) Draw an unlock pattern for login.
- 3) Configure the password protection parameters.

📖 Be sure that the email address for resetting password is correct.

### 3 Startup Wizard

For the first time login, you can configure the recorder quickly by Startup Wizard, and set options such as general settings, Imou cloud, network settings and record settings.

### 4 Live View

After you logged in, the system goes to multiple-channel live view mode by default. You can view the live video of each channel.



### 5 Playback

Select **Main Menu > Search** or right-click on the live view interface and select **Search**.

You can play back records according to the configured record type, record time and channel.


## App Operation

**Step 1** Scan the QR code below to install Imou Life App. Register and then log in to Imou Life App.


📖 Skip Step 1 if you have completed the download and registration of Imou Life App in the Startup Wizard.




**Step 2** Tap **+** at the top-right corner of **Device** tab, and then scan the QR code or enter the serial number of the recorder to add it to Imou Life.



**Step 3** After adding the recorder to Imou Life, you could perform operations such as viewing live videos, viewing alarms, setting alarms and sharing the Device.

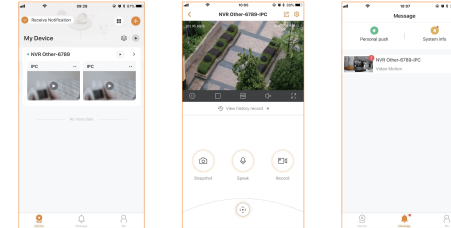

**Step 4** (Optional) You could share permissions of the recorder or a single video channel to family members.



## FAQ

**Q : Why does the Recorder fail to boot up?**

A : After the Recorder is powered on, observe the power status indicator on the front panel. If the blue light is off, check the wiring. If the blue light is on and the Recorder failed to boot up, contact the after-sales service.

**Q : The camera cannot work normally or start?**

A : Make sure that the network cable is connected well, and the recorder or switch supports PoE power supply.

**Q : Why are there no video records in local playback?**

A : Three possible reasons: 1. Wiring error. 2. HDD malfunction. 3. Record function is not enabled.

Check method:

1. Check the HDD status indicator. If the light is on , the HDD is working abnormally.
2. Select **STORAGE > HDD DETECT** to run the diagnosis, replace the HDD if there are damages.
3. Right-click the local GUI and select **Manual > Record** to check if the record function is enabled.

**Q : Why is the playback time inconsistent with actual time after enabling cloud storage?**

A : Ensure that the IPC time is consistent with Recorder time. Select **SYSTEM > GENERAL > General** to enable IPC Time Sync, you can also select **SYSTEM > GENERAL > Date&Time** to modify Recorder time.

## About the Guide

- This quick start guide is for reference only. Minor difference might be found in user interface.
- All the design and software here are subject to change without prior written notice.
- All trademarks and registered trademarks mentioned are the properties of their respective owners.
- Please visit our website or contact your local service engineer for more information.
- If there is any uncertainty or controversy, please refer to our final explanation.