





Product introduction



Person/Pet Detection

It activates the alarm and sends you notifications only when it detects a person or pet.



Easy to set up

Plug it in. Connect to WiFi. And you're good to go.



Auto Tracking

Automatically follows people and pets to record their every move.



4MP Super HD

See your home in finest detail. Much clearer than 1080p camera.



355° Pan & 50° Tilt

Control it to spin, and see areas where fixed cam cannot reach



Dual-Band WiFi

2.4/5 GHz WiFi for simple installation and reliable network performance.



Extend Smartness to Every Home

E Series E330 is compact and blends into your home seamlessly. Loaded with smart features, it can do many things like rotate at your disposal to reach more areas. Or send you customized motion alerts. With unbeatable price, it makes smart and high-quality home protection accessible to everyone.






Instant Detection & Tracking

Once the camera detects a person or pet, the camera will send you instant alerts and automatically rotate the lens to follow their footstep. In this way, it better guarantees the safety of your babies, the elderly and pets by recording their daily activities and alerting you when someone breaks in.

Auto tracking is available only in the horizontal direction.

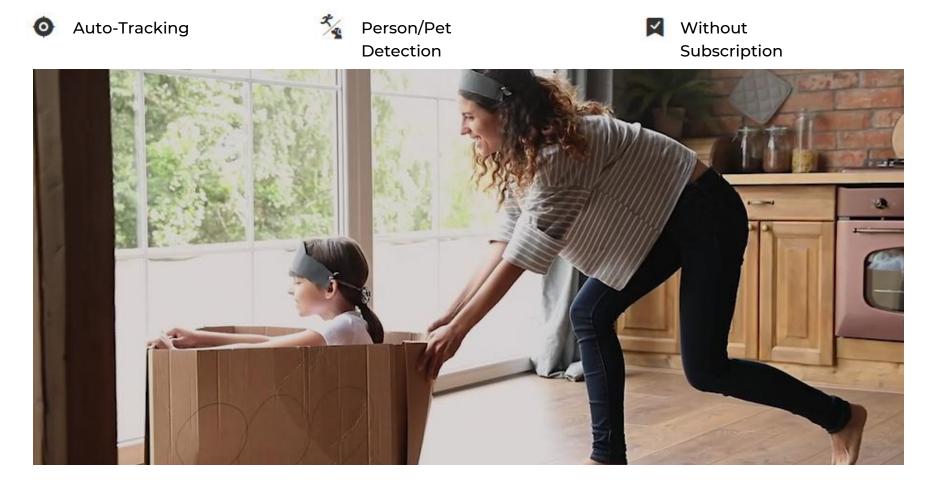



Whole Room Coverage in Super HD

Watching over a large area is now becoming easier. Boasting 355° pan & 50° tilt and 4MP Super HD, E Series E330 can deliver the whole picture of your home, even better, in stunning clarity and vividness.





Simple and Reliable Dual-Band WiFi

E Series E330 supports both 2.4 GHz and 5 GHz WiFi, offering more options of wireless connection. Dualband WiFi technologyand 2T2R MIMO antennas ensure a robust signal for reliable network performance



2T2R MIMO Antennas



2.4/5 GHz Dual-Band





Convenient Remote Access, Anytime & Anywhere



With only a few taps or clicks on Reolink App or Client, you can access your camera and check your property anytime, anywhere.



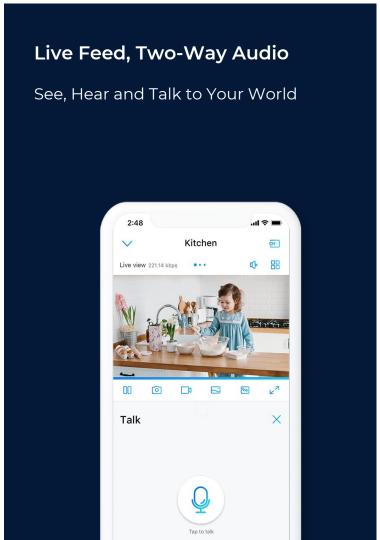


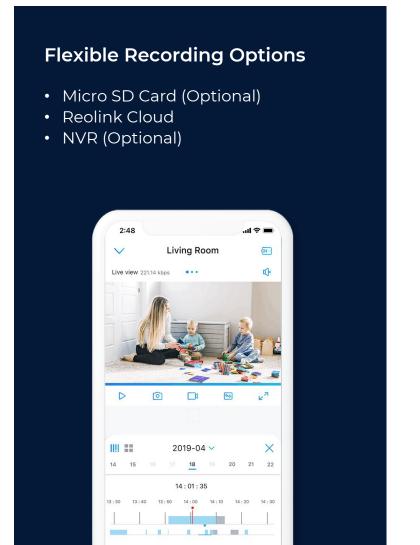






It can't be easier to control a security camera that works with Google Assistant. Just say "Hey Google, show me the backyard" and you will see live feed from the camera on your Google Nest Hub or Chromecast-enabled TVs. Actions speak louder than words? No, words are enough.

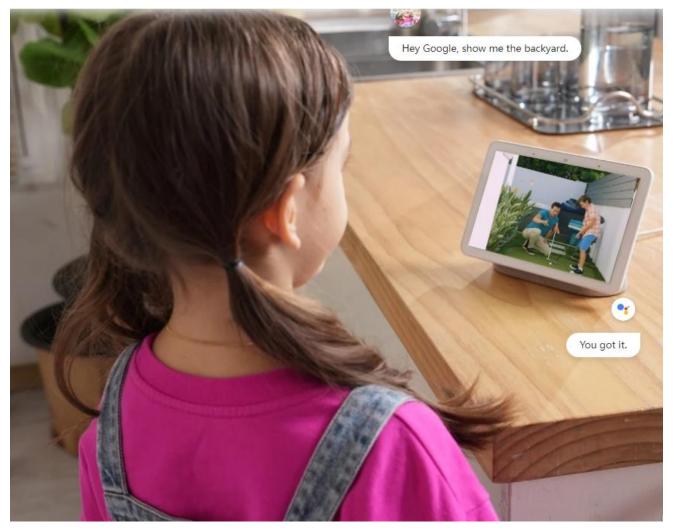






Set up E Series E330 in minutes, and you can have real-time talk with your kids anytime, keep an eye on mischievous pets or look after the elders from afar. It is discreetly-shaped, and blends into your home perfectly.

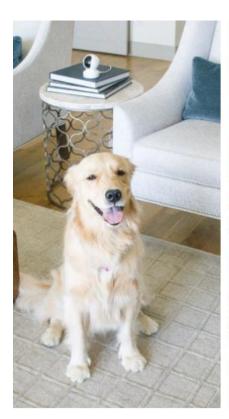





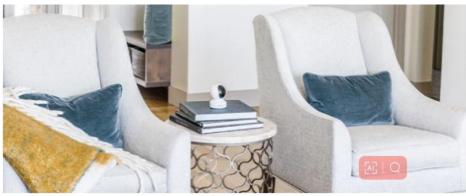







Product Specs





1. Daylight Sensor

5. Built-in Mic

2.8 IR LEDs

6. Reset Button

3. Lens

7. Micro SD Card Slot

4. Status LED



1. LAN Port

2. Speaker

3. Power

Product Specs



A 7			_	-		•
- \/		eo	X.	Δ		
•	ı		o.	$\overline{}$	uu	ш

Image Sensor 1/2.7"

Default Video Info 2560x1440 (4MP)@15FPS

Lens f = 4 mm, F = 2

Zoom N/A

Video Format H.264

Field of View Horizontal: 84°; Vertical: 45°

Pan/Tilt Angle Pan: 355° Tilt: 50°

Day&Night IR-cut filter with auto-switching

Infrared Night

Vision

12 M (40ft) (LED: 8pcs/14mil/850nm)

Color Night Vision N/A

Audio 2-way audio

Interface

Power DC 5.0V/1A

System Reset Button

Ethernet One 10M/100Mbps RJ45

Storage Micro SD Card Slot (support up to 256GB micro

SD card); Reolink Cloud; Reolink NVR

Software

Frame Rate 2-25FPS

Code Rate main: 1024-5120Kbps(Default:3072Kbps) sub: 128-512kbps(Default:160Kbps)

Browsers Supported N/A

OS Supported PC: Windows, Mac OS; Smartphone: iOS,

Android

Smart Alarm Motion Detection Al Detection

Record Mode Motion Recording; Scheduled Recording; 24/7

Recording

Protocols & Standards

SSL, TCP/IP, UDP, IPv4, UPnP, RTSP, SMTP,

NTP, DHCP, DNS, DDNS, P2P

20 users (1 admin account & 19

Maximal User user&administrator accounts); supports up to Access 12 simultaneous video streams (10

12 simultaneous video streams (10 substreams & 2 mainstreams)

IOT √

Work with Alexa, Google Assistant, Reolink Cloud

Product Specs



ΑI

Human Detection	√
Car Detection	N/A
Pet Detection	\checkmark
Auto Tracking	\checkmark
Wi-Fi	
Wireless Standard	IEEE 802.11 a/b/g/n
Operating Frequency	2.4 GHz/5 GHz
Wireless Security	WPA-PSK/WPA2-PSK
Working Environment	
Temperature	-10°C~+55°C(14°F~131°F)
Temperature Humidity	-10°C~+55°C(14°F~131°F) 20% ~ 85%
Humidity	20% ~ 85%
Humidity Waterproof	20% ~ 85%
Humidity Waterproof Size & Weight	20% ~ 85% N/A
Humidity Waterproof Size & Weight Dimension	20% ~ 85% N/A Φ84x118mm



www.reolink.com